

## Fire Tested Slim-line Mini Magnet

**Stock code: EA-ML600**

- Aluminium housing.
- 12/24 VDC @480/240mA.
- 280kgs (600lb) holding force.
- Built in surge protection.
- ML600-M = Monitored

### FEATURES

- Slim line mini magnet.
- Clean and compact design in aluminium.
- Single LED indication on ML600
- Multi LED indication on ML600-M
- No residual magnetism

### Suitable brackets:

- BK600ZL (ZL Bracket)
- BK600L (L Bracket)
- AH600 (Armature Housing)



The ML600 range of magnets and brackets have been fire tested to BSEN1634-1-2014 (30 & 60 minute timber door-sets)


Dimensions Magnet - 250 x 42 x 25 mm

Armature 180 x 35 x 10 mm

Brackets to suit

EABK600ZL for inward opening doors

EABK600L for outward opening doors

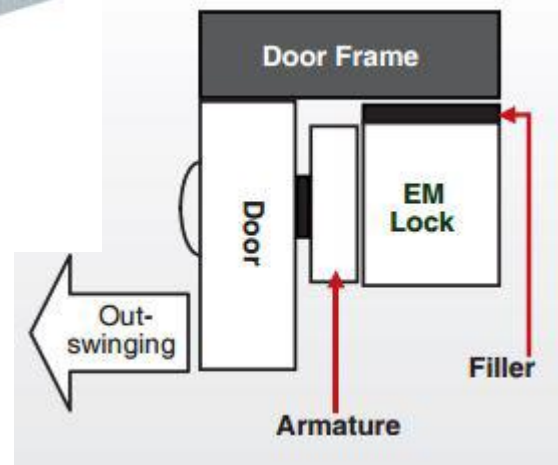

Please send your orders to [nigel@euroarchitecturalgroup.co.uk](mailto:nigel@euroarchitecturalgroup.co.uk)  
[chris@euroarchitecturalgroup.co.uk](mailto:chris@euroarchitecturalgroup.co.uk)